



Liquid Receiver

V series receiver are usually installed on high pressure liquid line of refrigeration systems to store excessive refrigerant when the load of the system changes.

FEATURES


- THE INLET IS USE SOLDER CONNECTION AND OUTLET USES THREAD CONNECTION
- INTERNAL FLOW-OUT IS REALIZED BY SUCTION TUBE



GENERAL SPECIFICATIONS

- Applicable refrigerant: R22, R134a, R407C and R410A etc.
- Applicable medium temperature: -30°C~+120°C (-22°F~+240°F)
- Applicable ambient temperature: -35°C~ +60°C (-22°F~+131°F)
- Maximum working pressure: 3.5MPa
- Certification: UL, PED

TECHNICAL PARAMETERS

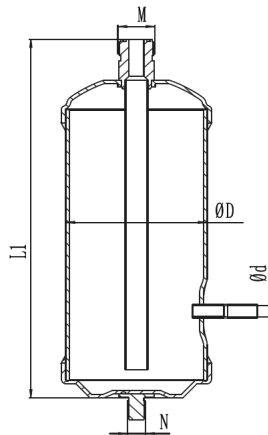

| Model | M in | d | | L | D | | L | | N |
|----------------|--------------|-------|-------|------|----|-------|-------|-----|--------------------|
| | | in | mm | | in | mm | in | mm | |
| LRA-V00076-017 | 3/4-16UNF-2A | 0,256 | 6,5 | 0,75 | 3 | 76,2 | 8,27 | 210 | screw 3/8-16UNC-2A |
| LRA-V00076-018 | 3/4-16UNF-2A | 0,256 | 6,5 | 0,6 | 3 | 76,2 | 6,73 | 171 | screw 3/8-16UNC-2A |
| LRA-V00127-016 | 3/4-16UNF-2A | 0,256 | 6,5 | 2,1 | 5 | 127 | 009 | 221 | screw 3/8-16UNC-2A |
| LRA-V00127-017 | 3/4-16UNF-2A | 0,381 | 9,67 | 3,5 | 5 | 127 | 12,95 | 329 | screw 3/8-16UNC-2A |
| LRA-V00153-004 | 3/4-16UNF-2A | 0,381 | 9,67 | 5 | 6 | 152,4 | 12,95 | 329 | screw 3/8-16UNC-2A |
| LRA-V00153-011 | 1-14UNS-2A | 0,381 | 9,67 | 6 | 6 | 152,4 | 15,95 | 405 | screw 3/8-16UNC-2A |
| LRA-V00153-012 | 1-14UNS-2A | 0,506 | 12,85 | 8 | 6 | 152,4 | 19,96 | 507 | screw 3/8-16UNC-2A |

